

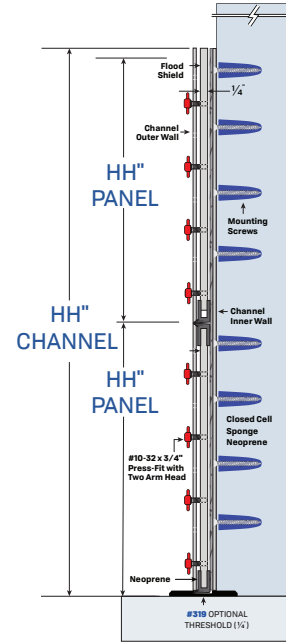



Stackable Flood Shield

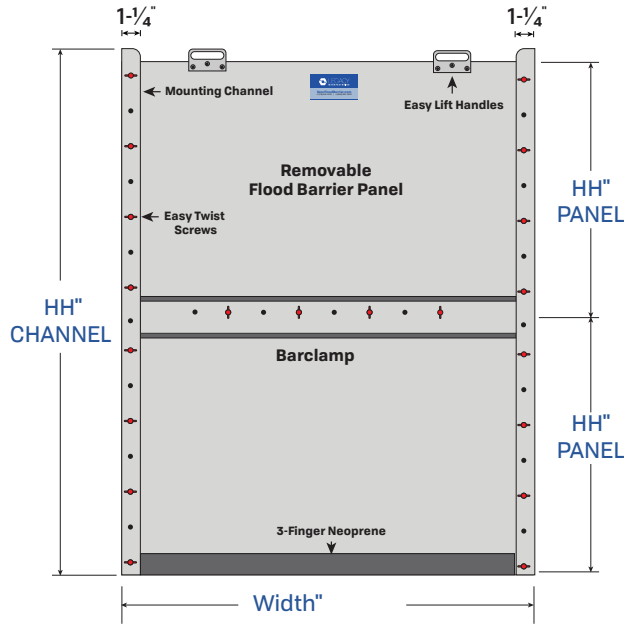

#5021 MOUNTED TO INSIDE OF FRAME

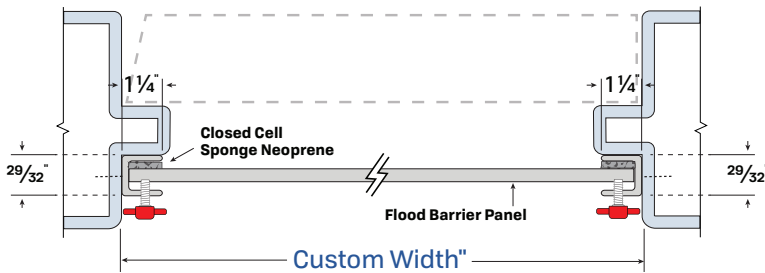

#5121 MOUNTED TO OUTSIDE OF FRAME

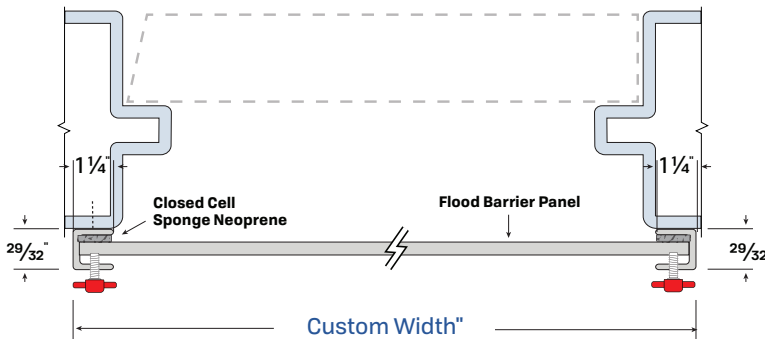

Product Specifications

| | |
|----------------------|--|
| Panel | 5052 type Marine-grade Aluminum Alloy |
| Channels | 1-1/4" x 29/32" x 1/8" aluminum extrusion 6062 alloy T5-T6, with 10-32 stainless steel Allen head tightening screws every 8" on center. |
| Seals | Neoprene lines the bottom of the shield. Sponge Rubber lines the channels. Our seals are composed of high-density rubber extrusions for increased strength with a low hardness that provides superior compression. |
| Hardware | #10 x 1-1/2" FHPH with plastic expansion tube anchors. Snap covers for safety provided for the top of the channels and for the mounting holes. |
| Installation | Can be installed on hollow metal, aluminum or wood frames, and on concrete, brick or metal surfaces. |
| Floor Surface | We recommend our #319 Threshold (1/4" x 2" beveled aluminum plate) |



Website: DoorFloodBarrier.com
 General Inquiries: contact@legacyllc.com
 Orders: orders@legacyllc.com
 Main Office: 415 Concord Avenue Bronx, NY 10455
 Phone: (718) 292-5333
 Fax: (888) 383-3330

PROJECT

DATE

COMPANY

NOTES