

How To Order: **Accurate Weatherstripping**

Example #3CHBR-84

 Easy Ways To
 Order

Email

Orders@LegacyLLC.com

Phone

 Local: +1 (718) 292-5333
 Toll Free: +1 (888) 383-3330

Fax

+1 (888) 383-3330

PART NUMBER & FINISH - OPTIONS - LENGTH
3CH
BR
PSA
84
PART #

1	8
2	8C
2C	21
2CH	B118L
3	B180
3C	S180
3CH	B181
4C	S181
4CH	B182
5CH	S182
6	B183
7	B184
7S	416C
7Z	

MATERIAL

Finishes vary by product. Please check available finishes listed for each product.

- BR** - Bronze
- SS** - Stainless Steel
- ZN** - Zinc

OPTIONS

Options vary by product. Please check available options listed for each product.


- Blank** - Standard Fasteners supplied
- PSA** - Pressure Sensitive Adhesive

LENGTH

Please specify to nearest 1/2"




#S182

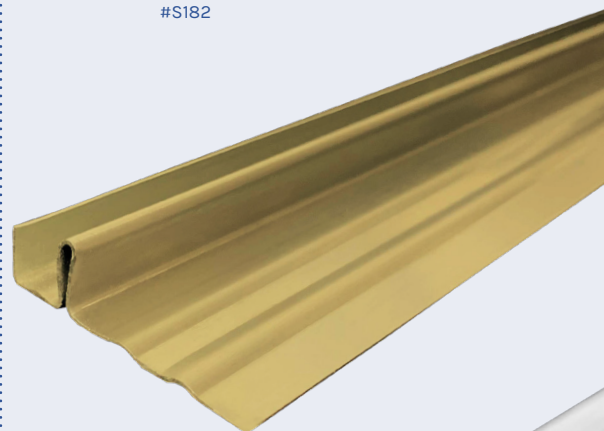

#3CHBR



#7Z

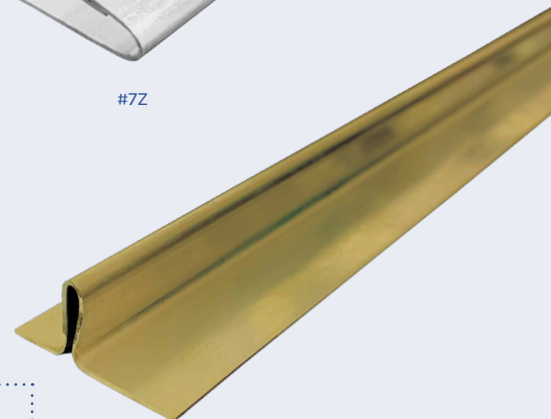


#1BR

Interlocking Metal Weatherstrips

Location	1-3/8"	1-3/4"	Thickness	Attachment
Head	#2	#3	.018	Nails
Sill	#3	#6	.018	Nails
Meeting Rail	#7	#7	.020	Nails
	#8	#8	.018	
Upper Sides	#2CH	#3CH	.018	Nails
Lower Sides	#4CH	5CH	.018	Nails



NO
COMPETITOR
EQUIVALENTS

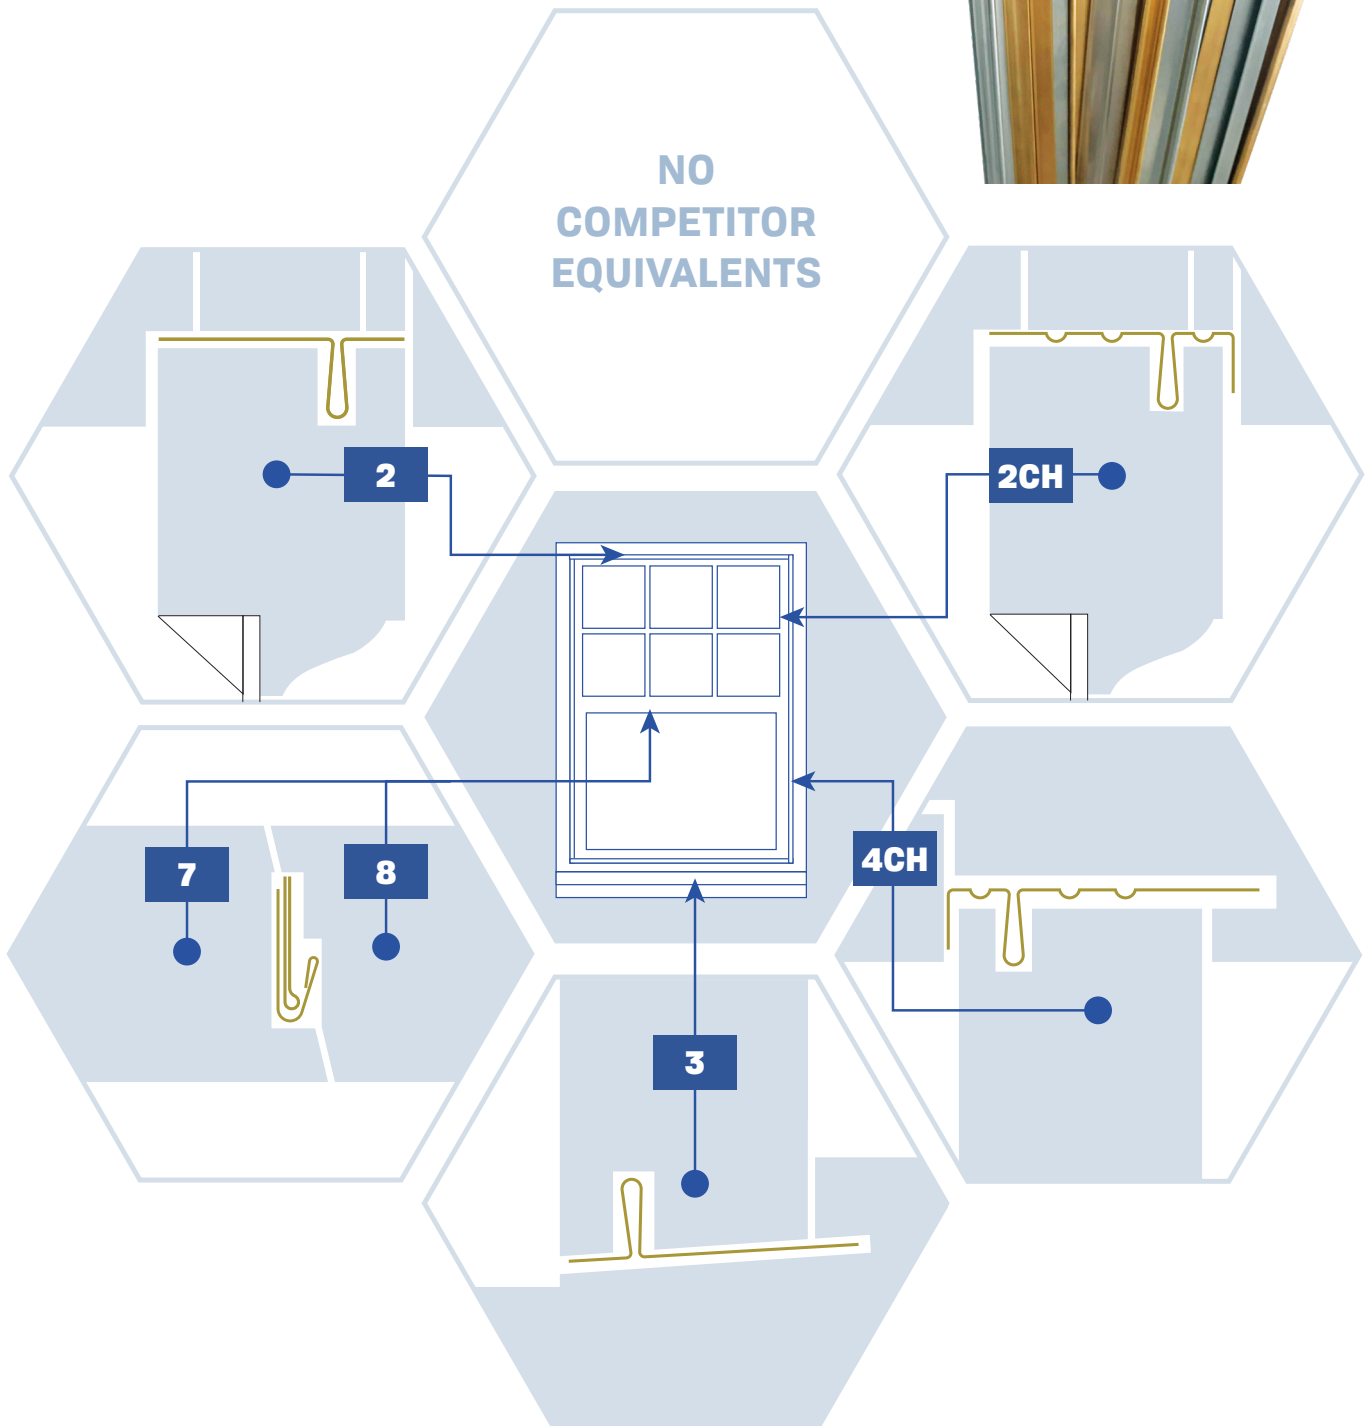


Specialty
Hinges




Hinge Door Springs

#B180 | #S180




Hinge Door Spring
MATERIALS: BR, SS
OPTIONS: PSA

#B181 | #S181




Hinge Door Spring
MATERIALS: BR, SS
OPTIONS: PSA

#B182 | #S182

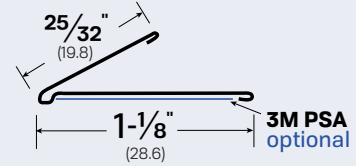


Hinge Door Spring
MATERIALS: BR, SS
OPTIONS: PSA

#B183




Hinge Door Spring
MATERIALS: BR

#B184




Hinge Door Spring
MATERIALS: BR

#B118L




Hinge Door Spring
MATERIALS: BR

#7S




Meeting Rail Hook
MATERIALS: ZN

#8




Meeting Rail Flat
MATERIALS: BR, ZN

#8C



Meeting Rail Flat
MATERIALS: BR, ZN

#21




Interlocking Threshold Hook
OPTIONS: ZN

#416C




Flat Head Nails - 7/8" #16
OPTIONS: Copper, Brass

#1




Plain Rib Strip 1" Base
MATERIALS: BR, ZN

#2




Plain Rib Strip 1-3/8" Base
MATERIALS: ZN

#2C




Side Strip 1-3/8" Base
MATERIALS: BR

#2CH




Side Strip 1-3/8" Base
MATERIALS: BR, ZN

#3




Plain Rib Strip 1-5/8" Base
MATERIALS: ZN

#3C




Plain Rib Strip 1-5/8" Base
MATERIALS: BR, ZN

#3CH




Side Strip 1-5/8" Base
MATERIALS: BR

#4C

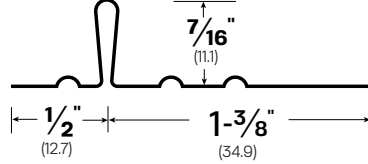


Plain Rib Strip 1-7/8" Base
MATERIALS: BR

#4CH

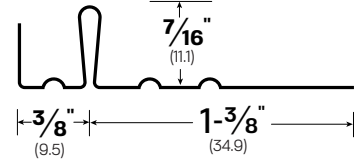


Plain Rib Strip 1-3/4" Base
MATERIALS: BR, ZN

#5CH

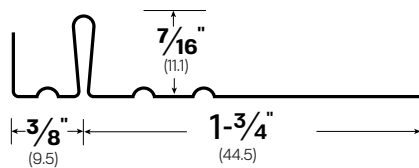


Side Strip 2-1/8" Base
MATERIALS: BR, ZN

#6

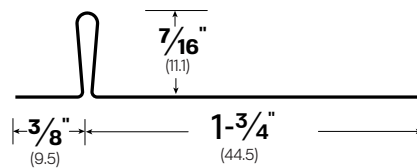


Plain Rib Strip 2-1/8" Base
MATERIALS: BR, ZN

#7



Meeting Rail Hook
MATERIALS: BR, ZN

Specialty Hinges

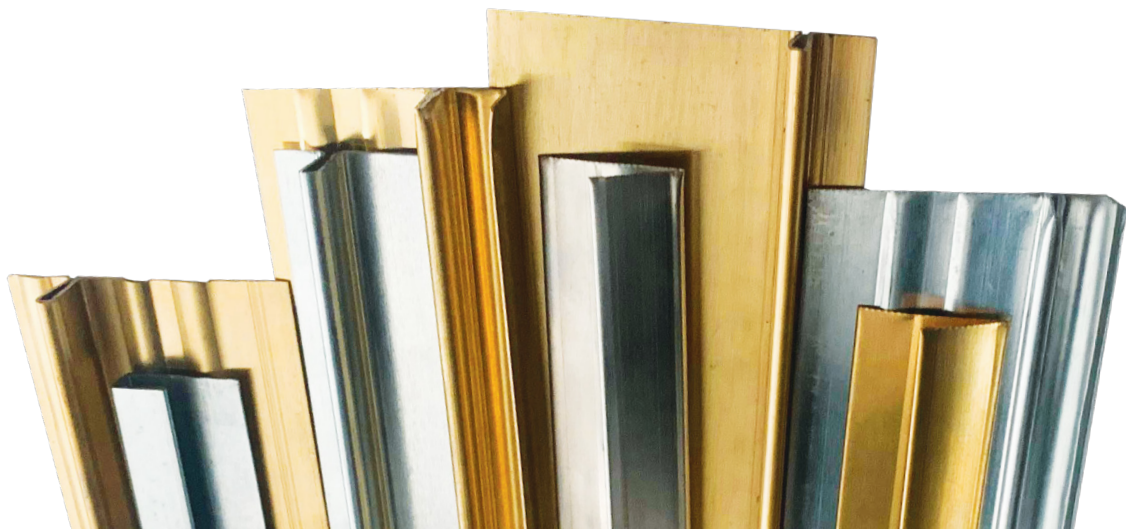

Flood Barriers

... protect openings and help safeguard building contents from floodwaters

Building on years of experience providing vital flood zone protection for doorways, Legacy now offers reliable, cost-effective flood barrier systems for virtually every building opening exposed to potential high-water flooding. Installing Legacy flood barriers can help satisfy National Flood Insurance Program (NFIP) requirements for coverage in designated flood zones, along with providing invaluable peace of mind to building owners hoping to minimize flood damages.

Legacy flood barrier panels are engineered for easy installation into pre-mounted aluminum brackets attached to frames or adjacent walls. When high water threatens, simply drop the barrier panel into the mounting channels and hand tighten the screw. Panels can be removed just as easily for storage when not in use. Closed cell sponge neoprene lines the bottom and sides of openings to ensure a watertight seal, as well as compensate for any gaps at door thresholds. These seals feature an innovative "three-finger" rubber profile for improved compression and better seals compared with conventional U-channel design.

Constructed from marine-grade aluminum, the removable flood barrier panels can be built to any specified height and are also stackable using watertight bar clamps. Milled Easy-Lift handles are another recent design enhancement. Interlocking posts, including outer sleeves for ground support, are supplied for specified opening widths greater than 48 inches, which translates to virtually no practical limit on the width of protected openings or spans.

Suitable for both residential and commercial applications, Legacy flood barriers comply with standards of the Federal Emergency Management Agency (FEMA) and Federal Insurance Administration (FIA) for use on doors in flood-prone areas. They are also ideal for houses with adjacent wetlands or in high-rainfall areas.



Specify Legacy Flood Barriers for:

- Entranceways and garage doors
- Sub-level and standard windows
- Exterior louvers or fireplaces
- Power-supply enclosures

LEGACY	5127	5027	5128	5129
NGP	FS	FS	-	-
PEMKO	-	-	-	-
ZERO	-	2070A	-	-



Product Specifications

Panel	5052 marine aluminum alloy
Frames	Channel 6062 alloy T5-T6, with 10-32 stainless steel Allen head tightening screws every 8" on center.
Seal	SPR or N as appropriate
Hardware	#10 x 1-1/4" FHPH with plastic expansion tube anchors. Snap covers for safety provided for the top of the channels and for the mounting holes.
Installation	Can be installed on hollow metal, aluminum or wood frames; and on concrete, brick or metal surfaces.
Floor Surface	Optional flat 1/4" x 2" bevels on 2 sides of the aluminum plate - #319 Threshold

